

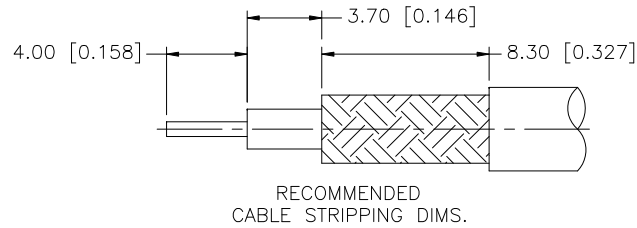


REV.	DATE	ECR NO.	DESCRIPTION
A	12/23/02	-	MODIFY CONTACT PIN LENGTH TO 12.25mm
B	07/16/08	-	MODIFY CONTACT PIN LENGTH TO 12.40mm

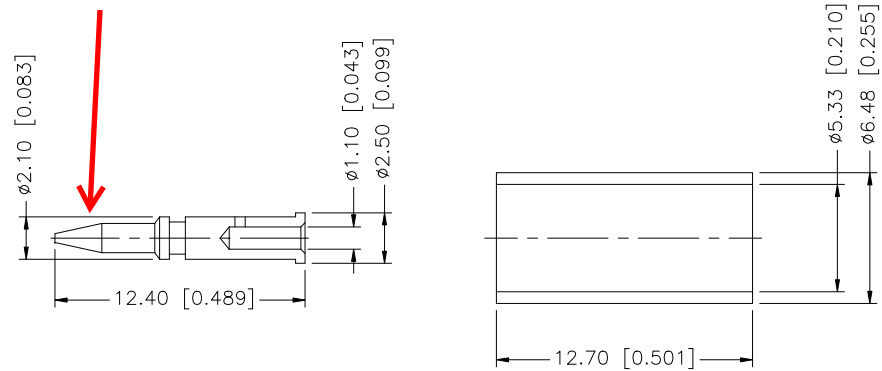

There is hole in pointed section. Heat tip with small tip soldering iron. Feed solder into hole. Use .031" solder or smaller and tip 1/32" or smaller.

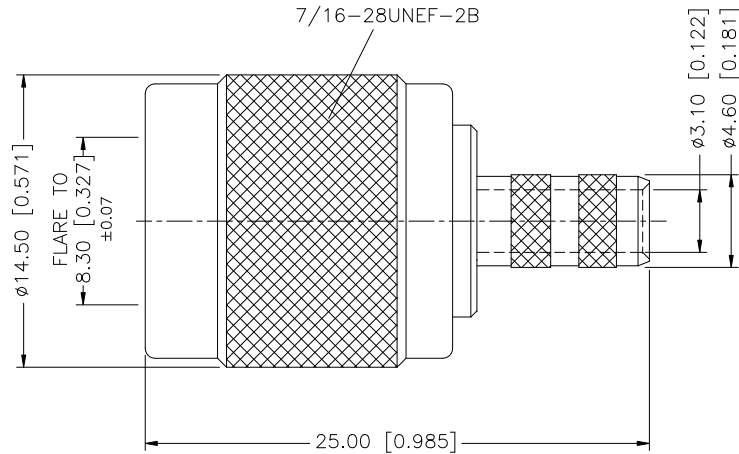

This connector requires a ratcheting crimper in order to get a secure crimp which will survive concrete pumping service.

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .213" [5.41]
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.73]

DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	DWG. NO.	REV.	SIZE	SCALE
8									
7									
6									
5	FERRULE	BRASS	NICKEL	1					
4	GASKET	RUBBER	RED	1					
3	INSULATOR	DELTRIN	NATURAL	1					
2	CONTACT PIN	BRASS	GOLD	1					
1	SHELL/BODY	BRASS	NICKEL	1					
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.</small> <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm</small> <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"</small>					APPROVALS DRAWN G.R.S. CHECKED ISSUED SHEET 1 OF 1 DATE 07/16/08	<h1 style="text-align: center;">Amphenol Connex</h1> <p style="text-align: center;">PART DESCRIPTION TNC STRAIGHT CRIMP PLUG-CAPTIVE CONTACT (FOR RG-58/U CABLE)</p> <p style="text-align: center;">PART NO. 122108</p>			
C:/122/122108.DWG						122108.DWG	B	A	NA